

## Full-HD Ultra short throw projector

# U321H

The U321H is particularly suited for classrooms and small to medium sized meeting rooms.

With 1080p resolution and 10,000:1 contrast, the U321H delivers perfect image quality for very detailed content, as well as high quality movies, including 3D content from Blu-ray players, thanks to its HDMI 3D support.

This ultrashort throw projector returns free space to small to medium sized classrooms and meeting rooms, projecting onto screen sizes between 85-100" without creating shadow or glare.

Users of demanding applications in higher education, such as design and engineering applications, will appreciate the 1080p resolution for the high level of detail achieved. Interactivity can be added retrospectively to this model with a multi-pen and/or multi-touch option.



## U321H

3,200 ANSI lumens

Full-HD

4.7kg

**HDMI**<sup>®</sup>  
HIGH-DEFINITION MULTIMEDIA INTERFACE

**MHL**<sup>™</sup>



### Benefits

- **Great picture quality**  
Thanks to 1080p resolution and 10,000:1 contrast.
- **Optional multi-pen and touch Interactivity**  
With auto-calibration on any kind of surface.
- **3D ready**  
For playback of engaging 3D applications and movies.
- **Almost no shadow or glare**  
Thanks to the ultra-short throwing distance.
- **Future proof connectivity**  
Numerous analog and digital connection terminals, including MHL support and network capability.

## Specifications

		NP-U321H
Projection System		Single DLP® (0.65")
Resolution*1		1,920 × 1,080 (Full HD)
Lens		Manual Focus F= 2.4, f= 3.72 mm
Light source (Lamp)	Normal ECO mode	220 W
	ECO mode off	260 W
Lamp life*2	Normal ECO mode	4,000 H
	ECO mode off	3,000 H
Filter life		4,000 H
Image size		85 to 100 inches
Light output*3 *4	ECO mode off	3,200 ANSI lumens
	Normal ECO mode	Approx. 80 % of ECO off
	ECO mode	Approx. 60 % of ECO off
Contrast ratio (white/black)*4		10,000 : 1 with lamp control
Maximum resolution		Up to 1080p (1,920 × 1,080)
Synchronization range	Horizontal	15 kHz to 100 kHz (RGB: 24 kHz or over)
	Vertical	50 Hz to 120 Hz (24Hz: Blu-ray 24P)
Keystone correction		Manual : ± Max 5 degrees
Input terminals	Computer	Mini D-sub 15 pin x 1
	Audio	Stereo mini jack x 1
		Video
	Audio	(L/R) RCA x 1
HDMI	HDMI x 2 (HDMI1 supports MHL function)	
Output terminals		Mini D-sub 15 pin x 1 Stereo mini jack x 1
Wired LAN port		RJ- 45 (10BASE-T / 100BASE-TX) x 1
Control terminals		D-sub 9 pin x 1
USB port		Power supply only / +5V 1A x 1 Service x 1
Built-in speaker		8 W monaural
Usage environment	Operational temperature	10°C to 35 °C, up to 80 % humidity (no condensation)
	Storage temperature	-20 °C to 60 °C, up to 90 % humidity (no condensation)
Power requirement		100 to 240 V AC, 50 Hz / 60 Hz
Input current		3.5 A to 1.5 A
Power consumption (100 to 130 V AC / 200 to 240 V AC)	ECO mode off	323 W / 312 W
	ECO mode	272 W / 264 W
	Standby (Network)	2.0 W / 2.2 W
	Standby (Normal)	0.18 W / 0.30 W
Net dimensions (W x H x D)		382 x 85 x 307 mm (not including protrusions)
Weight		4.7 kg
Gross dimensions (W x H x D)		515 x 230 x 491 mm
Gross weight		8.6 kg
Accessories		Power cord, remote control, batteries, cable cover, signal cable, CD-ROM (User's manual / Utility software), quick guide, important information, security sticker, attachment plate

\*1: Effective pixels are more than 99.99%.

\*2: The average time span for the brightness of the lamp to be reduced by half; does not refer to the warranty period for the lamp.

\*3: This is the light output value (ANSI lumens) when the [PICTURE] mode is set to [HIGH-BRIGHT].

If any other mode is selected as the [PICTURE] mode, the light output value may drop slightly.

\*4: Compliant with ISO21118-2005

## Accessory

### Included accessories



Remote control



Cable cover



Filters pre-installed

### Options



Replacement lamp  
NP34LP



Wall mount kit  
NP04WK



Interactive white board kit  
NP04Wi



Touch module  
NP01TM




Stylus pen  
NP02Pi



3D goggles  
NP02GL

## Throw distance and screen size

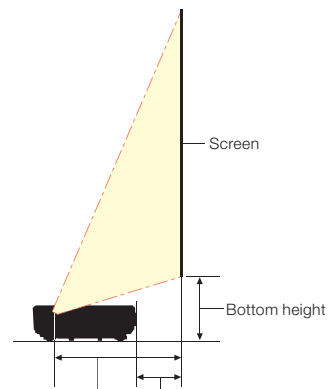


Throwing distance Distance between PJ -screen

U321H (Aspect ratio 16:9)

Screen size (H x V m)	Throwing distance(cm)	Bottom height(cm)	Distance bet. PJ-screen(cm)
85" (1.82 × 1.06)	47.4	26.2	22.2
90" (2.00 × 1.12)	50.2	27.3	25.0
95" (2.10 × 1.18)	53.0	28.5	27.8
100" (2.21 × 1.25)	55.8	29.6	30.6


The values in the tables are design values and may vary.

## Cabinet Dimensions

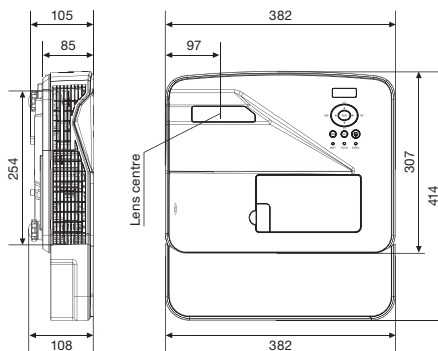

Unit: mm

## Terminals

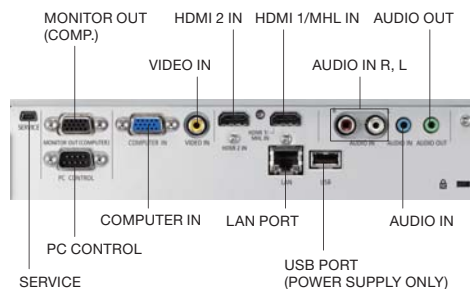

NavSet is trademark or registered trademark of NEC Display Solutions, Ltd. in Japan, the United States and other countries.

DLP and the DLP logo are registered trademarks or trademarks of Texas Instruments.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

MHL and the MHL logo are trademarks, registered trademarks or service marks of MHL, LLC in the United States and/or other countries.

Other hardware and software names are trademarks or registered trademarks of the respective manufacturers.

All rights reserved. All specifications are subject to change without notice. May 2015